



## FEATURES

- Oil lubricated rotary vane vacuum pump, nominal speed 5,6 Acfm (10 m<sup>3</sup>/h);
- Vacuum level control through high precision absolute-type vacuum sensor, which does not require calibration;
- Maximum vacuum 99,8% (2 millibar);
- 12,2" sealing bar, easily removable for cleaning;
- Brilliant stainless steel vacuum chamber with constant thickness, easy to clean being free of edges and receptacles;
- Waterproof control panel, resistant to liquids, humidity, dirt and dust;
- 20 editable user programs;
- 1 cycle for vacuum containers;
- "H2Out" pump oil dehumidification cycle;
- Resettable oil change alarm;
- Menu accessible to technical assistance for parameter adjustment and reading of cycles carried out;
- High-thickness transparent PMMA (Plexiglass) lid with polished and rounded edges; opens automatically at the end of the cycle;
- Lowering system of the lid at the end of the work in the rest position by releasing the rear gas spring, which allows to release the tension on the gas spring and on the lid;
- Access for easy maintenance through front opening of the casing;
- Standard "Easy" accessory for external vacuum in embossed bags;
- 2 PE-filling plates for product adjustment and cycle speed up;




SEALING BAR 12,2 inch

PUMP 5,6 Acfm

ABSOLUTE VACUUM SENSOR



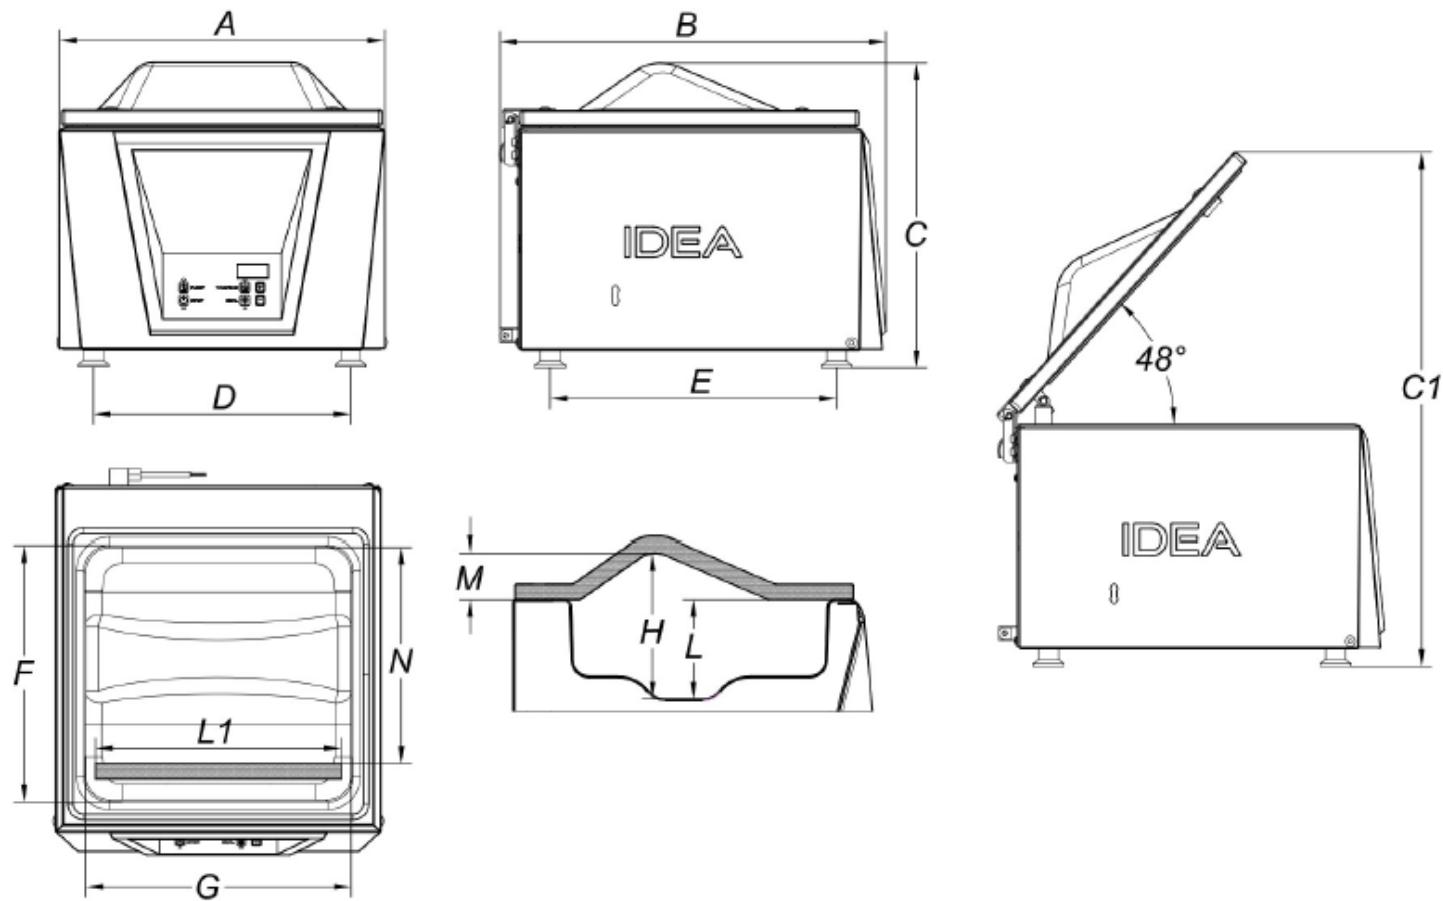

## TECHNICAL DATA

|   |                                       |
|---|---------------------------------------|
| Sealing bar length L1                     | inch 12,2                             |
| Nominal pump capacity                     | cfm 5,6                               |
| Final pressure                            | mbar 2                                |
| Maximum vacuum chamber dimensions (FxGxH) | inch 13,1x13,8x7,5                    |
| Usable vacuum chamber space (N)           | inch 11,1                             |
| Tank depth (L)                            | inch 5,1                              |
| Vacuum chamber volume                     | Usgal 3,7                             |
| Rated power                               | HP 0,2                                |
| Rated voltage/Frequency/Phases            | V/Hz 110V / 60Hz / 1Ph+N+PE           |
| Power cord and plug                       | 78,7 inch + IEC / Nema 5              |
| Machine body material                     | Stainless steel (AISI304)             |
| Tank material                             | Hydroformed stainless steel (AISI304) |
| Lid material                              | PMMA (plexiglas)                      |
| Maximum footprint (AxBxC)                 | inch 16,7x19,8x15,7                   |
| Maximum height with lid open (C1)         | inch 26,3                             |
| Distance between supports (DxE)           | inch 13,2x14,8                        |
| Weight (with shelves)                     | lbs 77,8                              |
| Noise level                               | dB(A) <70                             |
| Operating temperature (min-max)           | °F 53,6-104                           |