



## FEATURES

- Oil lubricated rotary vane vacuum pump, nominal speed 16 m<sup>3</sup>/h Busch;
- Vacuum level control through high precision absolute-type vacuum sensor, which does not require calibration;
- Maximum vacuum 99,8% (2 millibar);
- 410mm sealing bar, easily removable for cleaning;
- Brilliant stainless steel vacuum chamber with constant thickness, easy to clean being free of edges and receptacles;
- Waterproof control panel, resistant to liquids, humidity, dirt and dust;
- 20 editable user programs;
- 1 cycle for vacuum containers;
- "H2Out" pump oil dehumidification cycle;
- Resettable oil change alarm;
- Menu accessible to technical assistance for parameter adjustment and reading of cycles carried out;
- High-thickness transparent PMMA (Plexiglass) lid with polished and rounded edges; opens automatically at the end of the cycle;
- Lowering system of the lid at the end of the work in the rest position by releasing the rear gas spring, which allows to release the tension on the gas spring and on the lid;
- Access for easy maintenance through front opening of the casing;
- Standard "Easy" accessory for external vacuum in embossed bags;
- 2 PE-filling plates for product adjustment and cycle speed up;




SEALING BAR 410mm

PUMP 16m<sup>3</sup>/h

ABSOLUTE VACUUM SENSOR

## ACCESSORIES (NOT INCLUDED)

- Storage, cooking, and "cook&chill" bags; embossed bags;
- Cart with wheels and stainless steel shelf;
- Stainless steel inclined shelf for liquid packaging;
- Stainless steel vacuum containers and external vacuum suction kit;

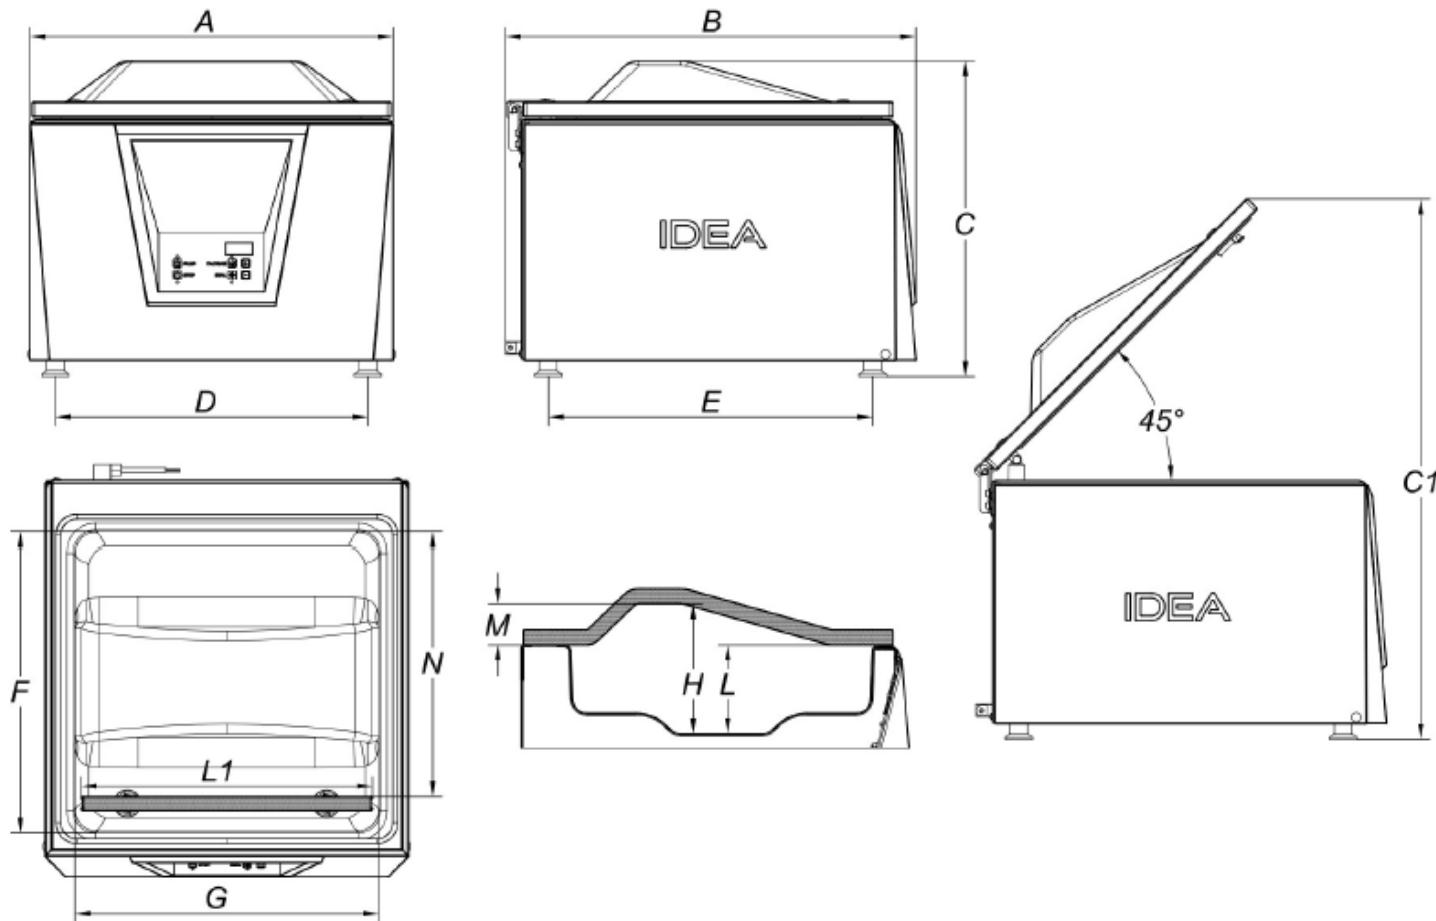

## TECHNICAL DATA

Sealing bar length L1	mm 410
Nominal pump capacity	m <sup>3</sup> /h 16
Final pressure	mbar 2
Maximum vacuum chamber dimensions (FxGxH)	mm 440x448x190
Usable vacuum chamber space (N)	mm 385
Tank depth (L)	mm 130
Vacuum chamber volume	lt 25,20
Rated power	W 900
Rated voltage/Frequency/Phases	V/Hz 220-240V / 50-60Hz / 1Ph+N+PE
Power cord and plug	2m + IEC / Schuko
Machine body material	Steel inox (AISI304)
Tank material	Steel inox (AISI304)
Lid material	PMMA (plexiglas)
Maximum footprint (AxBxC)	mm 531x600x461
Maximum height with lid open (C1)	mm 787
Distance between supports (DxE)	mm 457x474
Weight (with shelves)	kg 60,9
Noise level	dB(A) <70
Operating temperature (min-max)	°C 12-40