

FEATURES

DESCRIPTION

The models of the PASTRY line capture attention for their cutting-edge design and the smart functions of the 5" TFT touchscreen, which transform the concept of vacuum packaging machine into a "Food processor": the "chef" and degassing cycles allow for multiple food preparations and treatments, making it a versatile and multipurpose work tool, suitable for the gourmet restaurant sector;



DOUBLE SEALING BAR 2x38,9 inch

PUMP 70,6 Acfm


ABSOLUTE VACUUM SENSOR



- Oil lubricated rotary vane vacuum pump Busch, nominal speed 70,6 Acfm (100m³/h);
- Vacuum level control through a high precision absolute type sensor, which does not require calibration;
- Maximum achievable vacuum 99.8% (2 millibar);
- 38,9" double sealing bar, triple function single seal, double seal, seal-cutting. Easily removable for cleaning;
- AISI304 horizontal tank;
- Removable inert gas inlet bar with 6 nozzles and 'Gasplus' system for up to 90% inert gas for extremely crush-sensitive products and 'Softair' slow air re-entry as standard;
- Control panel with 5" TFT touch screen, protected by scratch-resistant tempered glass, resistant to liquids, humidity, dirt, and dust;
- 6 languages available (IT, EN, FR, ES, DE, RU);
- 8 user-editable cycles with customizable names;
- 16 pre-set "Chef Pastry" cycles for food process and packaging, some of them benefit "repeatability" function (soft cakes, pastry creams, pasteurized base water-based, pasteurized base milk-based, whipped creams, panettone, biscuits/short pastry, pralines, yeast cakes, infusions, tramezzini/sandwiches, piping bags creams, pizza/focaccia, bread/loaves, powders/spices, custard, 3 pre-set cycles with inert gas injection, 3 pre-set cycles with inert gas injection, 3 pre-set cycles for vacuum containers, 2 generic pre-set cycles for preservation and sous-vide cooking; 5 editable and nameable automatic degassing cycles over 10 phases with gas injection possibility;
- Cycle search system according to criteria: Recent, Top ten, and Favorites (up to 12 cycles assignable to this category);
- Oil pump dehumidification cycle "H2Out", with automatic alerts for: product cooling necessity, "H2OUT" cycle execution, or oil change need;
- Menu accessible to technical support for parameter adjustment and reading of the history of cycles and maintenance performed;
- Wi-Fi module for connection to the Orved cloud;
- PMMA lid in bluish high thickness, with rounded edges. Automatic opening at the end of the cycle;
- Lid lowering system in rest position through side lid lock;
- Detachable counter bar;
- Fan system for heat extraction;
- Easy maintenance access through the front opening of the casing;
- PE shelves for product placement and cycle speed-up.

ACCESSORIES (NOT INCLUDED)

- Storage, cooking, and "cook&chill" bags; embossed bags;
- Stainless steel inclined shelf for liquid packaging;
- Stainless steel vacuum containers;
- External vacuum suction kit;
- Powder filter;
- Ergonomic handle for lid lowering;
- Gas injection bar and counter bar available in a different standard configuration;

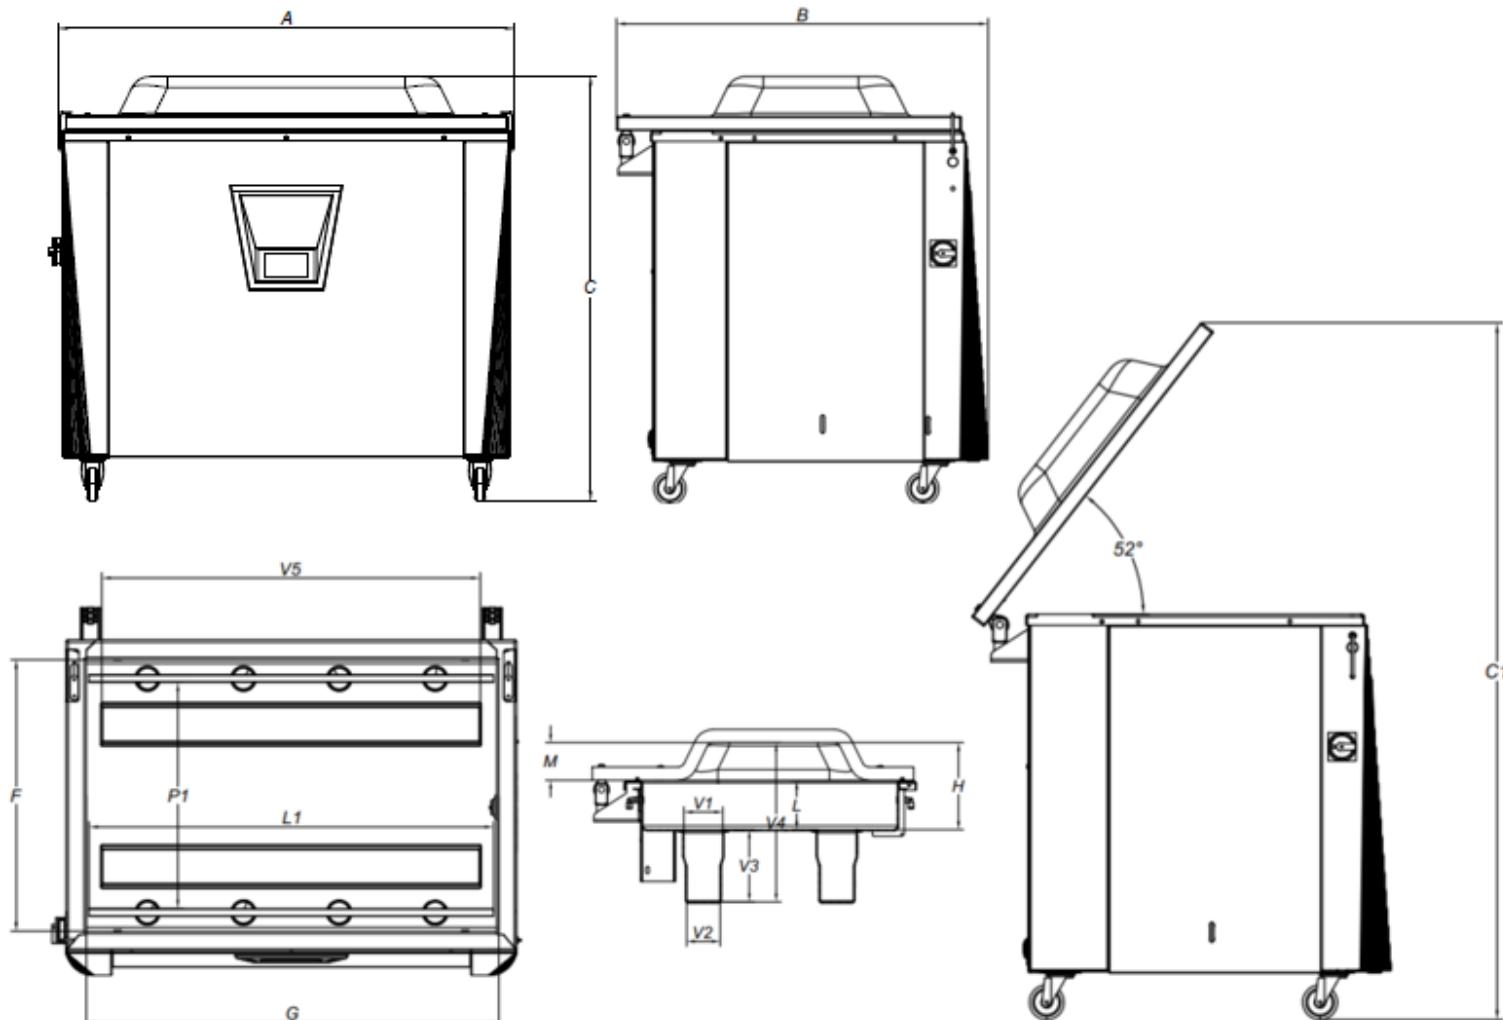

TECHNICAL DATA

Sealing bar length L1	inch 38,9
Nominal pump capacity	cfm 70,6
Final pressure	mbar 2
Maximum vacuum chamber dimensions (FxGxH)	inch 26,8x40,7x9
Maximum vertical vacuum chamber dimensions (V1/V2xV5xV3)	inch 4,1/3,5x37,3x7,5
Usable vacuum chamber space (P1) 2B	inch 22,4
Tank depth (L) (V3)	inch 5,1/7,56
Vacuum chamber volume	Usgal 39,6
Vacuum vertical chamber volume	Usgal 5
Rated power	HP 5
Rated voltage/Frequency/Phases	V/Hz 208-460V / 60Hz / 3Ph+PE
Power cord and plug	118,1inch + plug 32A 9h
Machine body material	Steel inox (AISI304)
Tank material	Steel inox (AISI304)
Lid material	PMMA (plexiglas)
Maximum footprint (AxBxC)	inch 45,3x36,5x42,1
Maximum height with lid open (C1)	inch 63,1
Distance between supports (DxE)	inch -
Weight (with shelves)	lbs 710
Noise level	dB(A) <70
Operating temperature (min-max)	°F 53,6-104